


High Reliability Epoxy Coated Thermistor - ESCC 4006/013

Introduction

NTC Thermistor soldered to 30 AWG Silver Plated Copper. Unit coated with an epoxy resin.

Betatherm is listed on the EPPL (European Preferred Parts List) & QPL (Qualified Parts List) as a supplier of high quality components and probe assemblies. These thermal sensing products can be supplied and tested to different levels; LAT 1, 2 or 3.

Shape and Dimensions

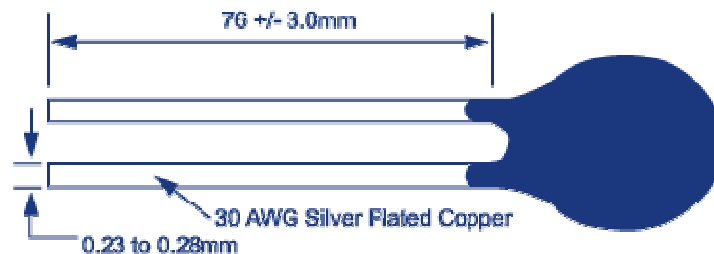

Features

- Resistance from 1K ohms to 5K ohms at 25°C.
- Tolerance: $\pm 0.2^\circ\text{C}$ from 0°C to 70°C.
- Operating Temperature:
-55°C to + 115°C.
- Manufactured to ESCC 4006/013 Specifications.
- Component Type: 34TD25A.



北京赛斯维测控技术有限公司

北京市朝阳区望京西路48号

金隅国际C座1002

电话：+ 86 010 8477 5646

传真：+ 86 010 5894 9029

邮箱：sales@sensorway.cn

<http://www.sensorway.cn>



BetaTHERM Sensors
BetaTHERM Sensors
Design Centre North America
HL Planar Technik GmbH
Measurement Specialties

Ballybrit Business Park
910 Turnpike Road
2670 Indian Ripple Rd.
Hauert 13, D-44227
1000 Lucas Way

Galway, Ireland
Shrewsbury, MA 01545
Dayton, OH 45440
Dortmund, Germany
Hampton, VA23666

+353 91 753238
+508 8420516
+937 4271231
+49 23197400
+757 7664297

Electrical Specifications			ESA/SCC 4006/013								
Variant	Part No.	RZ (Note1)	Resistance/Temperature Characteristics (Notes 2 & 3)								
			-55°C	-40°C	-25°C	0°C	+25°C	+50° C	+75° C	+100° C	+115°C
01	1K3A351	Nominal Tol.(± %)	95,620 3.69	33,512 2.32	13,017 2.10	3,265 1.02	1,000 0.88	360 0.76	0.76 1.16	67.9 1.46	- -
02	2K3A352	Nominal Tol.(± %)	191,23 9 3.69	67,023 2.32	26,034 2.10	6,530 1.02	2,000 0.88	720.2 0.76	296 1.16	135.8 1.46	- -
03	3K3A353	Nominal Tol.(± %)	287,93 7 3.70	100,70 1 2.32	39,073 2.10	9,795 1.02	3,000 0.88	1,080 0.76	444 1.16	203.6 1.46	- -
04	4K3A354	Nominal Tol.(± %)	383,91 6 3.70	134,26 8 2.32	52,098 2.10	13,060 1.02	4,000 0.88	1,440 0.76	592 1.16	271 1.46	177.8 1.36
05	5K3A355	Nominal Tol.(± %)	479,89 5 3.70	167,83 5 2.32	65,122 2.10	16,325 1.02	5,000 0.88	1,800 0.76	740 1.16	339 1.46	222 1.36
06	10K3A739	Tol. (±%)	959,79 0 3.70	335,67 0 2.33	130,24 4 2.10	32,650 1.02	10,000 0.88	3,600 0.76	1,480 0.76	678.0 1.46	444 1.36

NOTES

1. For test purposes, when zero power is dissipated and the ambient temperature is held as specified, the value is referred to as Rz (Zero Power Resistance).
2. Temperature Tolerance ranges is as follows:
 $\pm 0.5^{\circ}\text{C}$ from -55°C to -41°C and $+100^{\circ}\text{C}$ to $+115^{\circ}\text{C}$
 $\pm 0.35^{\circ}\text{C}$ from -40°C to -1°C and $+75^{\circ}\text{C}$ to $+99^{\circ}\text{C}$
 $\pm 0.2^{\circ}\text{C}$ from 0°C to $+74^{\circ}\text{C}$
3. The reference resistance is specified at $+25^{\circ}\text{C}$
4. Using Customer SAR's (Specification Amendment Record), BetaTHERM Sensors can manufacture a part to any customer R/T Chart.
5. It is not recommended to operate the device continuously in excess of 115°C , to do so may affect the stability of the device.

For details on the minimum order quantity (MOQ) of this product, please contact BetaTHERM Sensors or your local BetaTHERM Sensors representative

北京赛斯维测控技术有限公司
 北京市朝阳区望京西路48号
 金隅国际C座1002
 电话：+86 010 8477 5646
 传真：+86 010 5894 9029
 邮箱：sales@sensorway.cn
<http://www.sensorway.cn>



BetaTHERM Sensors
 BetaTHERM Sensors
 Design Centre North America
 HL Planar Technik GmbH
 Measurement Specialties

Ballybrit Business Park
 910 Turnpike Road
 2670 Indian Ripple Rd.
 Hauert 13, D-44227
 1000 Lucas Way

Galway, Ireland
 Shrewsbury, MA 01545
 Dayton, OH 45440
 Dortmund, Germany
 Hampton, VA23666

+353 91 753238
 +508 8420516
 +937 4271231
 +49 23197400
 +757 7664297